

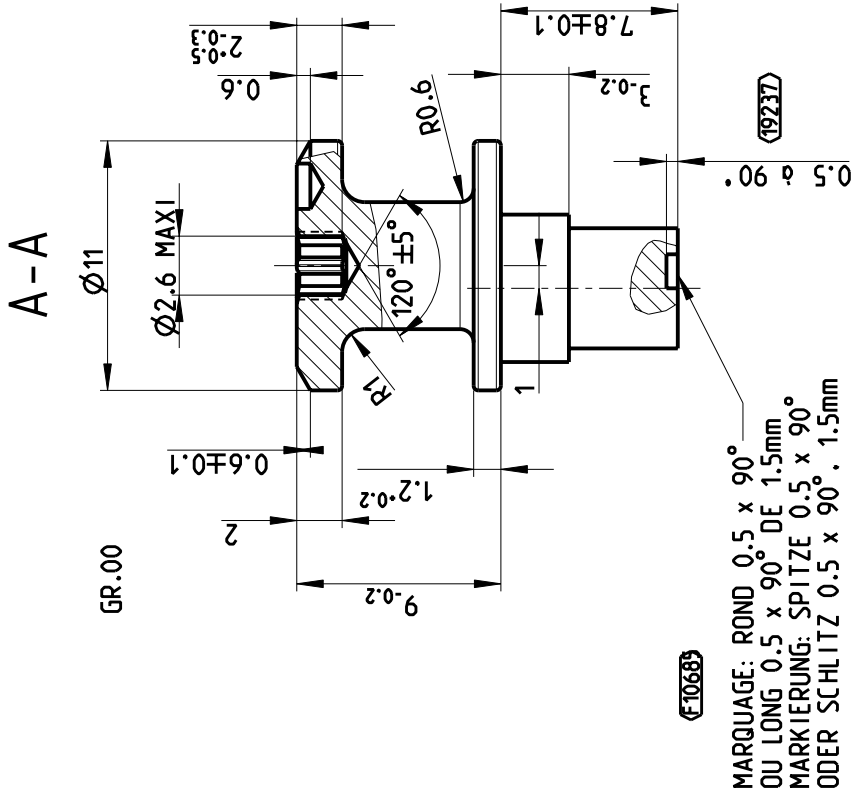
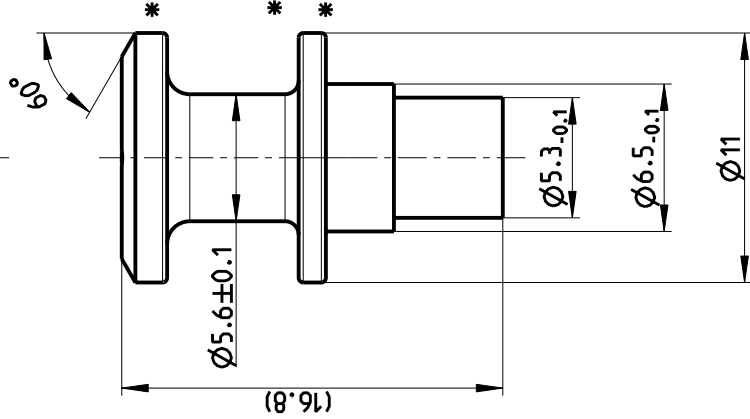
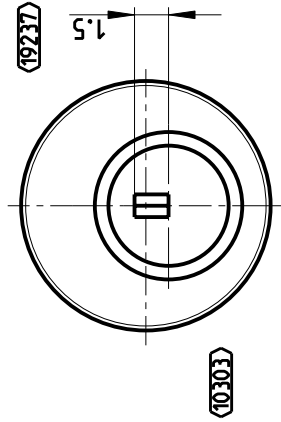


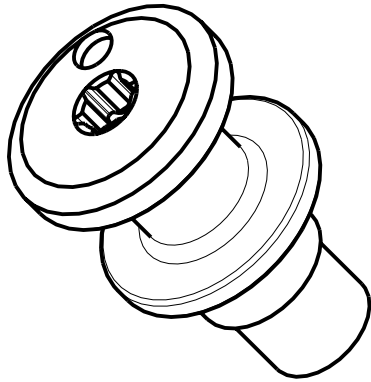

MARQUAGE: ROND 0.5 x 90°  
OU LONG 0.5 x 90° DE 1.5mm  
MARKIERUNG: SPITZE 0.5 x 90°  
ODER SCHLITZ 0.5 x 90° , 1.5mm

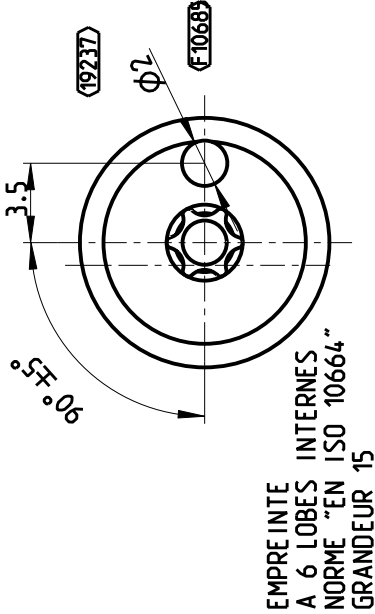

# COUPLE MINI = 6Nm  
MINIMAL DREH-MOMENT = 6Nm

\* ARETES CASSEES PAR BARILLAGE RAYON OU CHAMFREIN ENV. 0.2mm  
ALLE KANTEN DURCH TROWALISIEREN GERUNDET: CA. R0.2mm ODER FASE 0.2mm

| DIFF | ORD. | REG. |
|------|------|------|
|      | 3/22 | --   |
|      | --   | --   |
|      | --   | --   |
|      | --   | --   |
|      | --   | --   |
|      | --   | --   |
|      | --   | --   |
|      | --   | --   |
|      | --   | --   |

Remark

--

--

--

--

--

--

--

--

--

--

--

--

--

--

--

--

--

--

--

--

Tolerance

FN 05311

Material

S300Pb

profile

ACIER

Revision

7

Version

3

Mod. No.

F10701

first release

L8455

Date

08-01-07

Supplier

GR.01

Standard

--

level date

08-Jan-07

Level

Pvalide

Ver.

--

Draft

090103

BJ

Part No.

20270

Replacement for

--

Size


4

Drawing No.

E-21487-00-0-00

1

A



Description  
BOLZEN  
GALET EXCENTRIQUE  
--

Standard

--

level date

08-Jan-07

Level

Pvalide

Ver.

--

Draft

090103

BJ

Part No.

20270

Replacement for

--

Size

4

Drawing No.

E-21487-00-0-00

1

A